检测报告



BUILDING TRUST

性能
检测报告

BUILDING TRUST

HBQI INSTITUTE

221700110366

中国认可
国际互认
检测
TESTING
CNAS L0290

检 验 报 告

TEST REPORT

二维码防伪

防伪码：644HL8

No. JC202600551

产品名称 Name of sample	SikaWall 111 Levelling 底层耐水腻子
受检单位 Inspected unit	——
生产单位 Produced by	标称：西卡（上海）管理有限公司
委托单位 Commission unit	西卡（上海）管理有限公司
检验类别 Test purpose	型式检验

湖北省产品质量监督检验研究院

Hubei Product Quality Supervision and Inspection Research Institute

检验检测专用章

注 意 事 项

1、报告无我院（中心）“检验检测专用章”或印章不全无效。

2、报告无主检、审核、批准人员签字无效。

3、 报告涂改无效。

4、复印报告未重新加盖我院“检验检测专用章”无效。

5、未经我院（中心）书面批准，不得复制（全文复制除外）检验报告。

6、送样委托检验，检验结论仅对来样负责。

7、对检验报告若有异议，应于收到报告之日起十五日内向我院提出，逾期不予受理。

注:对监督抽查（监督抽检）检验报告异议，应于收到报告之日起十五日内向下达任务的部门提出。

未取得资质认定的相关项目不得加盖资质认定（CMA）标志，其结果仅作为科研、教学或内部质量控制之用。

地址:湖北省武汉市武昌区公平路6号

邮编：430061

电话：（027） 88215268 （武汉基地）（027 ） 59370530 （葛店基地）

传真：（027） 88215765 （武汉基地）（027 ） 59370531 （葛店基地）

E-mail: 1127232632@qq.com

葛店基地检测地点:湖北省鄂州市葛店开发区创业大道东侧

HBQI INSTITUTE

湖北省产品质量监督检验研究院

检 验 报 告

No：JC202600551 共2页第1页

产品名称	SikaWall 111 Levelling 底层耐水腻子			商标	标称：西卡
规格型号	——		生产日期/批号		——
委托单位名称及联系电话	西卡（上海）管理有限公司				
委托单位地址	上海市静安区江场三路250号				
生产单位名称及联系电话	标称：西卡（上海）管理有限公司				
任务来源	检（协）字2026年JC202600551号				
送样日期	2026年1月29日	送样人员	刘敏	样品到达日期	2026年1月29日
样品数量	5kg	抽样基数	——	检查封样人员	——
样品等级	——	样品/抽样单编号	JC202600551	样品状态	样品外观无异常
检验开始日期	2026年1月30日		检验结束日期	2026年3月11日	
检验依据	JG/T 298-2010、GB 18582-2020				
检验项目	全项				
检验结论	该样品按JG/T 298-2010、GB 18582-2020检验，单项结论见续页。 (检验检测专用章) 2026年3月11日				
备注	N型，粉：水=1：0.26。水性墙面涂料。客户指定有害物质限量按GB 18582-2020检验。				

批准:杜明 审核:叶展鹏 主检:全姗姗

湖北省产品质量监督检验研究院
检 验 报 告 (续页)

No：JC202600551　　

序号	检验项目名称		标准要求 (单位)	实测值 (单位)	单项结论
1、JG/T 298-2010					
1.1	容器中状态		无结块、均匀	无结块、均匀	合格
1.2	施工性		刮涂无障碍	刮涂无障碍	合格
1.3	干燥时间 (表干)		单道施工厚度＜2 mm：≤2 h 单道施工厚度≥2 mm：≤5 h	单道施工厚度1 mm：＜2 h 单道施工厚度2 mm：＜5 h	合格
1.4	初期干燥抗裂性 (3 h)		无裂纹	无裂纹	合格
1.5	打磨性		手工可打磨	手工可打磨	合格
1.6	粘结强度	标准状态	＞0.50 MPa	0.70 MPa	合格
		浸水后	＞0.30 MPa	0.87 MPa	合格
1.7	耐水性		48 h无起泡、开裂及明显掉粉	48 h无起泡、开裂及明显掉粉	合格
1.8	pH		----	12.8	----
2、GB 18582-2020					
2.1	VOC含量		≤10 g/kg	＜1 g/kg	合格
2.2	甲醛含量		≤50 mg/kg	＜5 mg/kg	合格
2.3	苯系物总和含量 [限苯、甲苯、二甲苯(含乙苯)]		≤100 mg/kg	＜50 mg/kg	合格
2.4	总铅（Pb）含量 (限色漆和腻子)		≤90 mg/kg	0.8 mg/kg	合格
2.5	可溶性重金属含量 (限色漆和腻子)		镉（Cd）含量：≤75 mg/kg	＜0.7 mg/kg	合格
			铬（Cr）含量：≤60 mg/kg	0.9 mg/kg	合格
			汞（Hg）含量：≤60 mg/kg	＜0.5 mg/kg	合格
以下空白					

法国A+
检测报告

BUILDING TRUST

TEST REPORT

APPLICANT	:	**SIKA (SHANGHAI) MANAGEMENT CO., LTD.**
ADDRESS	:	ROOM 102,NO.252,JIANGCHANG 3RD ROAD , JING'AN DISTRICT SHANGHAI CHINA.
SAMPLE DESCRIPTION	:	SIKAWALL 111 LEVELLING INTERIOR BOTTOM PUTTY
STYLE / ITEM NO.	:	NA
SUPPLIER	:	NA
COUNTRY OF ORIGIN	:	NA
COUNTRY OF DESTINATION	:	NA
SAMPLE RECEIVED DATE	:	AUG. 06, 2021
TEST PERIOD	:	AUG. 06, 2021 TO SEP. 24, 2021
RESULT SUMMARY	:	

TEST(S) REQUESTED BY APPLICANT:	RESULT
French VOC Regulation	A+

**********FOR FURTHER DETAILS, PLEASE REFER TO THE FOLLOWING PAGE(S)**********

SIGNED FOR AND ON BEHALF OF
EUROFINS TESTING TECHNOLOGY (SHENZHEN) CO., LTD.

James Luo
Senior VOC Testing Engineer

Jack Lu
Lab & Product Development Manager

Eurofins Testing Technology (Shenzhen) Co., Ltd. 欧陆检测技术(深圳)有限公司 检测专用章 Testing Service

The above sample(s) and sample information was/were submitted and identified on behalf of the applicant. Eurofins will not be liable for the authenticity of the information. This test report is valid for the tested sample only. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.


Test Method

Method	Principle	Parameter	Detection Limit	Uncertainty
ISO 16000 parts -3, -6, -9, -11	TDS-GC/MS	VOC CMR	5 µg/m³ 1 µg/m³	17.5% (RSD) U = 2 x RSD= 35%
	HPLC/UV	Volatile aldehydes	5 µg/m³	16% (RSD) U = 2 x RSD= 32%

Test chamber parameter					
Chamber volume (L):	119	Temperature (°C):	23	Relative humidity (%):	50
Air change rate (per hour):	0.5	Loading ratio (m^2/m^3)	1		
Test condition: Sample stayed in test chamber during the whole 28 days testing period.					
Sample preparation					
Application (g/m^2):	3000				
Powder (g):Water (g)	1:0.25				

Resulting VOC Emissions Class Label

This recommendation is based on French regulation as published on 25 March 2011 (décret DEVL1101903D) and on 13 May 2011 (arrêté DEVL1104875A). For details please see www.eurofins.com/france-voc.

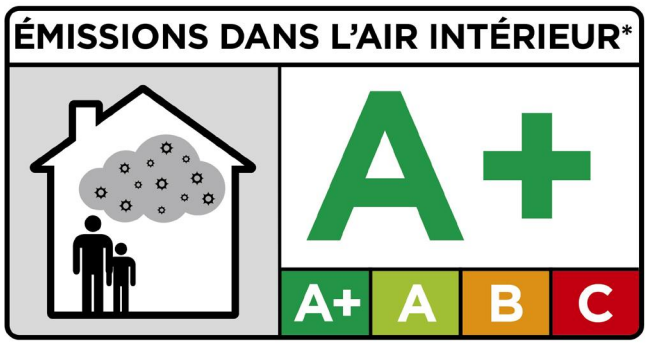

Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions)

The tested product **fulfills** the requirements of the French regulation DEVP09908633A of 30 April 2009 and DEVPP0910046A of 28 May 2009. For details please see www.eurofins.com/france-voc.

TO BE CONTINUED

Test Result

	Concentration after 28 days µg/m³	C	B	A	A+
TVOC	<20	>2000	<2000	<1500	<1000
Formaldehyde	<5	>120	<120	<60	<10
Acetaldehyde	<5	>400	<400	<300	<200
Toluene	<5	>600	<600	<450	<300
Tetrachloroethylene	<5	>500	<500	<350	<250
Ethylbenzene	<5	>1500	<1500	<1000	<750
Xylene	<5	>400	<400	<300	<200
Styrene	<5	>500	<500	<350	<250
2-Butoxyethanol	<5	>2000	<2000	<1500	<1000
Trimethylbenzene	<5	>2000	<2000	<1500	<1000
1,4-Dichlorobenzene	<5	>120	<120	<90	<60
CMR compounds		Maximum allowed air concentration			
Benzene	<1	<1			
Trichloroethylene	<1	<1			
Dibutyl phthalate (DBP)	<1	<1			
Diethylhexyl phthalate (DEHP)	<1	<1			

Remark:
< Means less than
> Means higher than

This VOCs test covered only substances that can be adsorbed on Tenax-TA and that can be thermally desorbed and analyzed by gas chromatography mass spectrometric detector. If other emission occurred then these could not be monitored or with limited reliability only. The method is not optimal for very volatile compounds. For these substances small results and a higher uncertainty in the measurement cannot be excluded. VOCs without pure standards were identified by comparison with a mass spectrum obtained from a library. Calibrated as toluene equivalent.

Note:
The chamber test and analyses were done in Eurofins Testing Technology (Shenzhen) Co., Ltd.

Other Information / Remark:

(1) Additional to test report EFSN21080421C-V.
(2) According to customer's declaration, the sample(s) mentioned in this additional test report is the same as in original test report ref. No. EFSN21080421C-V.

TO BE CONTINUED